

Weather Critical Operations

The Right Decisions in Any Weather

DASTEC S.R.L.

Representantes / Distribuidores Exclusivos

 Argentina

Tel: (+54 11) 5352 2500


Email: info@dastecsrl.com.ar

Web: www.dastecsrl.com.ar

e · a passion for precision · passion pour la précision · pasión por la precisión · passione per la precisione



www.lufft.de

 **Lufft**



Weather-critical

Applications

Offshore wind farms and increasingly large solar parks play an important role in global energy supply. Our mobility knows no bounds. We rely on an infrastructure that functions efficiently - on land, in water or in the air. Experienced decision-makers ensure that "outdoor" technology operates flawlessly. Environmental sensors are indispensable here as the basis for decisions.

Application Questions

Can the plane land safely, even in tropical rainfall and winter conditions? Is the travel time for my route calculated correctly as a function of the weather conditions? Are there alternatives that are not restricted by the weather?

Can I continue to operate the wind turbine under the prevailing wind conditions? Is the position of the turbine optimally aligned? Does my solar farm deliver the expected (energy) yield?



Does my plant protection strategy work and does it prevent attack by insects or fungi?

Can snow-making equipment be optimally controlled so that there is still enough snow for tourism?

Is the air quality below the technically permissible maximum values? What long-term trends do we observe in nitrogen oxides and particulate matter in a region or city?

Will ceilometers be able to recognize the type of cloud automatically in the future?

Can large public buildings and industrial buildings be managed more efficiently, resulting in energy savings?

Will a Smart Home be able to operate autonomously and energy efficiently in the future, according to the user's individual needs?



Smart sensor technology for better solutions.



Metrology

Sustainability

Your systems are complex and must have a long service life. We also specified these requirements for our environmental sensors:

- > High long-term stability of the sensor
- > Very long service life
- > Extreme robustness
- > Precise measurements
- > Calibration capability of the sensor
- > Reliable measurement even under extreme conditions
- > Software upgrades



You take the decisions...

... we supply the measurement data that you need for this purpose. We deal with the measurement of all environmental data. Smart sensors allow not only reliable measurement with state-of-the-art technology, but also computing and diagnostic functions. In addition, via the serial interfaces of the smart sensor, the information can also be forwarded for subsequent processing in various languages (protocols). Whether cloud, datalogger or "smart communicator". Smart sensors facilitate streamlined hardware architecture in the entire measurement setup.



Applications

- > Proactive runway management
Safe winter roads with optimal salt application
- > Automatic spreading
 - > Environmentally friendly agricultural applications
 - > Efficient plant control for renewable energies
 - > Production of artificial snow
 - > Energy efficient buildings



System Concept

Individual sensors or modular-designed all-in-one sensors supply data via an open interface for further processing. Whether GPRS, LAN, WLAN or satellite transmission, the necessary infrastructure to provide real-time data for decision-making is available worldwide.

Reliable Measurement Data

Big Data provides ever increasing amounts of environmental data. Which sources can you use for decision-making? Which data can you trust? To answer these questions, in the future every measurement network needs to contain several reference stations, which measure correctly at all times. Guaranteed.

We help you to master complex weather conditions.



Our Customer is King

User First



Reliable Measurement Data Verification and Calibration

What type of maintenance do you want for your environmental sensors?

Reactive (in case of faults) with regular maintenance intervals? Or proactive with timely replacement of critical components? Predictive, taking account of probabilities of failure? Or availability-based, i.e. you expect data delivery, for example, in 99.5% of all possible cases? On this basis, verification and calibration activities can be performed on your measuring systems.



Calibration (traceability)
Environmental sensors can be laboratory tested, including traceability. In the best case, the characteristic curve of the sensor can also be corrected (adjustment). And the date of the next verification can then be set.




Verification
The measurement point is compared with a reference. Ideally, not only at a given time, but over a period of about one hour. A decision can then be taken regarding adjustment or replacement.



Reference Sensor WS3000

- > Exchangeable sensors
- > Redundant air pressure sensor
- > Excellent ventilation
- > Metal housing

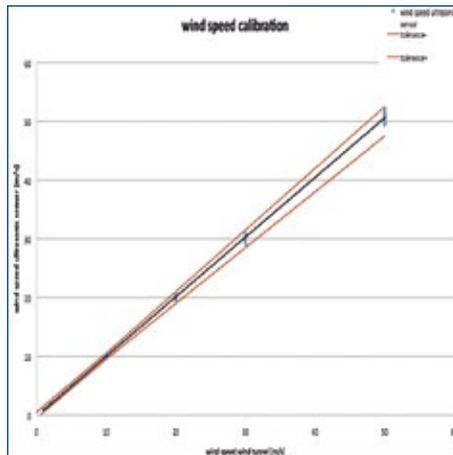

Characteristic Curve of a Wind Sensor

- > Target / actual comparison over the entire measuring range
- > Optimization of measurement accuracy by storing the characteristic curve in the sensor
- > Secondary calibration by the user during use

reference standard	calibration item			
	M1 (up) in mbar	M1 (down) in mbar	M3 (up) in mbar	M4 (down) in mbar
740.00	740.01	740.01	740.01	740.01
750.00	750.01	750.01	750.01	750.01
800.00	800.00	800.00	800.00	800.00
850.00	850.00	850.00	850.00	850.00
900.00	900.00	900.00	900.00	900.00
950.00	950.00	950.00	950.00	950.00
975.00	975.00	975.00	975.00	975.00
1000.00	1000.00	1000.00	1000.00	1000.00
1050.00	1050.00	1050.00	1050.00	1050.00
1100.00	1100.00	1100.00	1100.00	1100.00

reference standard	calibration item				
	mean value	measurement deviation	repeatability	hysteresis	uncertainty of measurement
740.00	740.00	+0.00	0.00	0.00	0.15
750.00	750.00	+0.00	0.00	0.00	0.15
800.00	800.00	0.00	0.00	0.00	0.15
850.00	850.00	0.00	0.00	0.00	0.15
900.00	900.00	0.00	0.00	0.00	0.15
950.00	950.00	0.00	0.00	0.00	0.15
975.00	975.00	0.00	0.00	0.00	0.15
1000.00	1000.00	0.00	0.00	0.00	0.15
1050.00	1050.00	0.00	0.00	0.00	0.15
1100.00	1100.00	0.00	0.00	0.00	0.15

Meteorology and Metrology:

- > Verification of accuracy, e.g. air pressure, traceable to primary standards (NIST, DAkKS, etc.).

Trust the measurement data whose origin you know.

WCO Sensors

Matrix

As well as measuring typical weather parameters such as air temperature, relative humidity, air pressure, wind and precipitation, weather-critical applications require additional sensors to provide further information.

- > Road and runway conditions
- > Wetness measurement for speed adjustment
- > Fog detection
- > Snow depth measurement
- > Cloud height measurement for safe landing of aircraft and helicopters
- > Redundant sensor technology for maximum reliability

Cloud height



CHM15k



CHM8k

Measuring range up to 15 km	<input type="checkbox"/>	
Measuring range up to 8 km	<input type="checkbox"/>	<input type="checkbox"/>

Snow depth



SHM30



SHM31

UMB protocol	<input type="checkbox"/>	<input type="checkbox"/>
ASCII protocol	<input type="checkbox"/>	<input type="checkbox"/>

Visibility



VS2k



VS20k

Measuring range up to 2 km	<input type="checkbox"/>	
Measuring range up to 20 km	<input type="checkbox"/>	<input type="checkbox"/>

Road / Runway Conditions



	IRS31 pro	ARS31 pro	NIRS31	StaRWIS	MARWIS
Mobile					■
Stationary	■	■	■	■	
Installed in asphalt	■	■			
Non-contact measurement			■	■	■
Freezing temperature	■	■	■	■	
Surface temperature	■	■	■	■	■
Depth temperature sensor(s)	■				
Condition	■		■	■	■
Water film	■		■	■	■
Friction	■		■	■	■
Air temperature / humidity				■	■

Temperature / Relative Humidity / Air Pressure



	WS3000	WS3100
Redundant air pressure (opt.)	■	■
Calibration certificate	■	■
Metal housing	■	■
Radiation measurement		■

A photograph of a snowplow clearing a road in a snowy landscape. The plow is moving from right to left, pushing a large pile of snow and slush. The background shows snow-covered trees and a hillside. The text 'Snow Depth' is overlaid in the upper left, and 'Laser-Technology' is overlaid in large letters across the center. Below the title, there are several lines of text in a smaller font.

Snow Depth

Laser-Technology

Clearing and spreading or just spreading?

What is the cost to the municipality for the subcontractor to carry out winter maintenance?

It is important to know the precise snow depths.

Due to climate changes, weather experts no longer expect snowfalls to be regular, but rather heavier.



Despite long-term warming, snowfall intensity is actually increasing. Snow depth measurements are an integral part of meteorological measuring networks.



Winter services and ski regions need precise information on snow depth, whether for slope preparation or proactive clearing.



In most cases, the point measurement with a single laser is sufficient. Independent of temperature, wind and relative humidity, the measurement result is highly accurate in all conditions.



The measurement method of the SHM31 is based on a combination of phase comparison and time of flight. The platform-independent UMB-Config tool enables the parameterization of the sensor according to the individual requirements.

The point or surface area measurement for a winter without surprises.

Cloud Height

Cumulus, Stratus or Cirrus?

- > **Measuring range: Up to 15,000 meters**
- > **Extremely high sensitivity of the measurement signal with excellent reproducibility under identical conditions**
- > **Detection of up to 9 cloud layers with simultaneous thickness measurement**
- > **Degree of coverage (Sky Condition Index)**
- > **Cloud penetration depth**
- > **Height of the aerosol layer and boundary layers**
- > **Vertical visibility (VOR)**
- > **Aerosol backscatter profile**
- > **In preparation: Differentiated aerosol detection, depolarization**
- > **Fine dust, sand, volcanic ash, "chemical weather"**
- > **Verification with cloud height simulator**



Ceilometers help to investigate the impact of climate change. These findings are incorporated into future forecasting models.




Equipment is required on location to check the functionality. The Lufft cloud height simulator allows ceilometers to be tested, even under a cloudless sky.




Ceilometers are often of dual use – for airport weather information and meteorology.



The building of international monitoring networks for cloud and aerosol observation has begun. Currently, there are significant gaps worldwide. Through the complete automation of the observation networks, ceilometers will take on a very important role in the future, and the intention is also to automatically detect the cloud type.

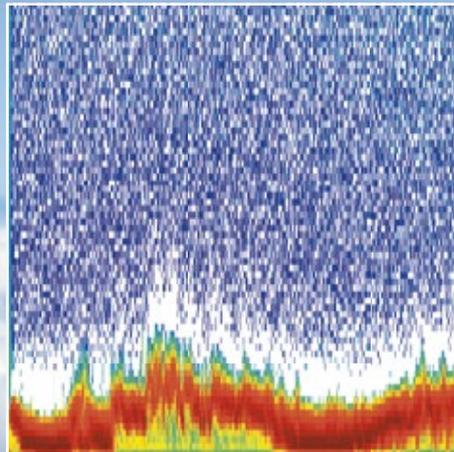

Ceilometers that are used for both airports and meteorology / climate research must provide precise measurement of all air layers. Very high cirrus clouds, e.g. over the equator, are over 10 km high.

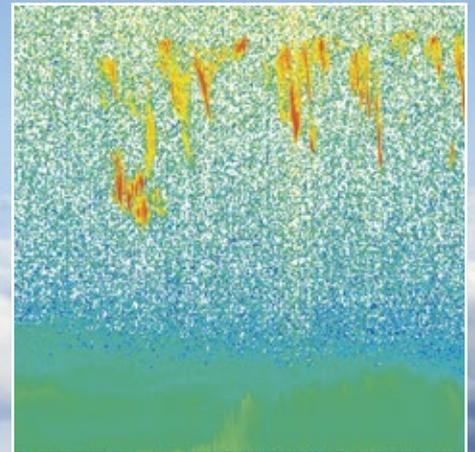

The extremely stable laser sensor produces raw data for all heights, which are converted into the different results. Signal processing by means of microprocessors is critical to the quality of the output. Cooperation with climate and meteorology researchers worldwide allows constant improvement of the data output and ensures application-specific use.

Cloud and aerosol measurement for precise forecasting of air pollution.


Platforms and

Variants

Modern sensor technology based on platform concepts. As a result, new variants required by our users can be developed faster.

Platforms can be realized with replaceable or hardwired sensors.

Different platforms allow us to meet the respective requirements in the best possible way.

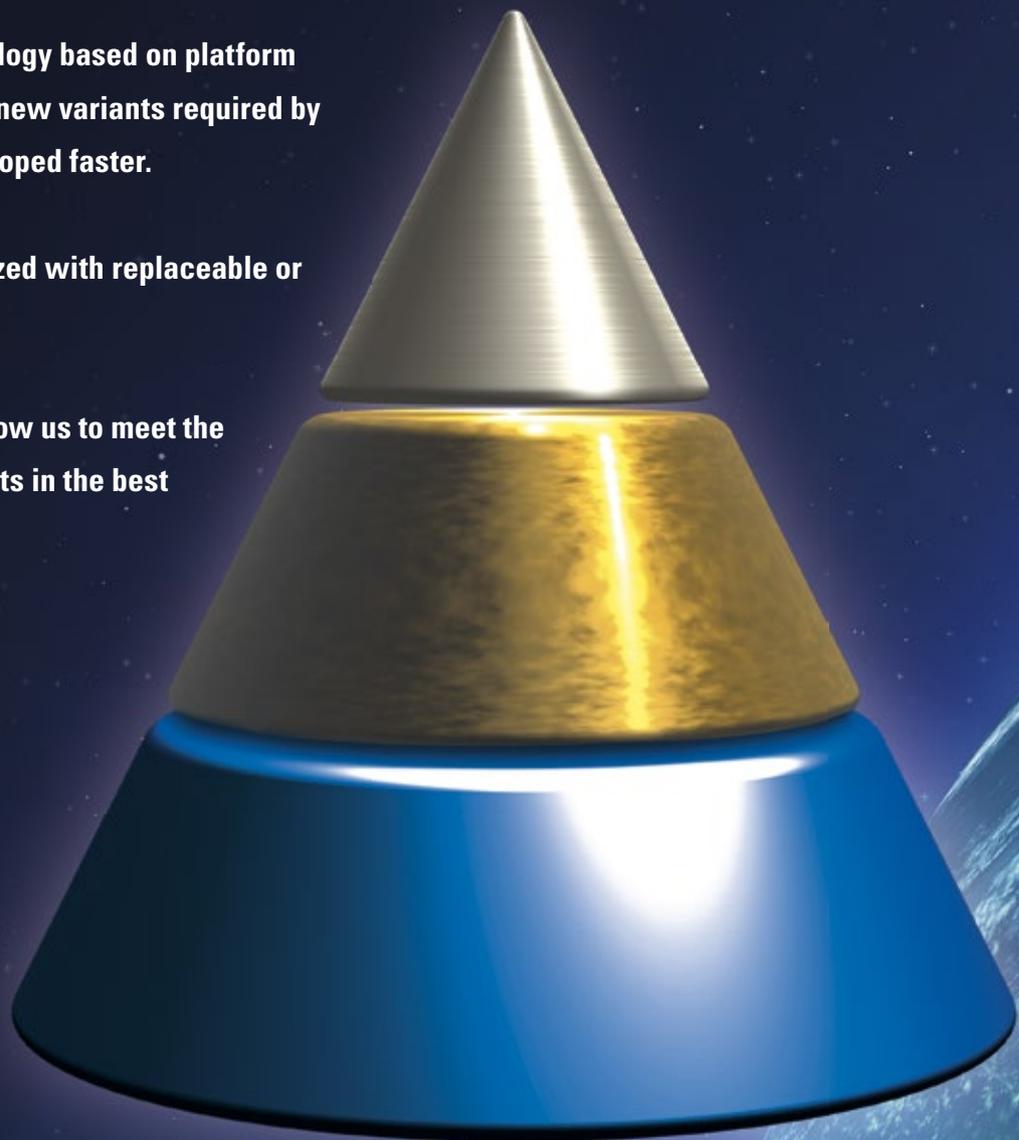

THE REFERENCE WMO-STANDARD METEO-SMART

The WMO (World Meteorological Organization) places high demands on the sensors to be used. The reference class must not only meet these requirements, but exceed them. The WMO standard sensor is intended to ensure that weather observation takes place worldwide on the basis of identical principles. And though WMO accuracies are not always required, a professional environmental sensor is still needed. That's why we developed the "Meteo-Smart" series.

Cloud height

Snow depth

Current weather

Visibility

The Reference



CHM 15k



Parsivel



WMO-Standard



CHM 8k



SHM 31



WS100



V20k


Meteo-Smart



SHM 30




R2S



V2k

Matrix Overview WS Series

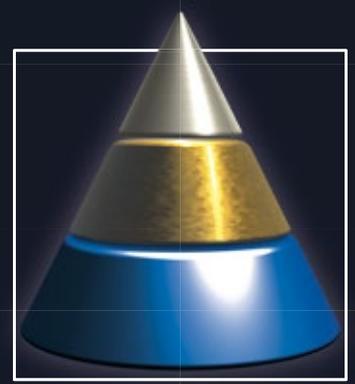

Wind	Temperature Relative humidity Air pressure	Temperature Relative humidity Air pressure Precipitation	Temperature Relative humidity Air pressure Radiation
------	--	---	---

Lufft WS Sensors: The Reference

							
Ventus		WS3000			WS3100		

Lufft WS Sensors: WMO-Standard

								
WS200	V200	WS300		WS400		WS310	WS301/303	

Lufft WS Sensors: Meteo-Smart

								
			WS401		WS302	WS304		

THE REFERENCE WMO-STANDARD METEO-SMART

Temperature
Relative
humidity
Wind speed
and direction

Temperature
Relative humidity
Air pressure
Wind speed
Wind direction
Radiation

Temperature
Relative humidity
Wind speed
Wind direction
Precipitation

Temperature
Relative
humidity
Wind speed
Wind direction
Precipitation
Radiation



WS510



WS800



WS500



WS501



WS503



WS600



WS700



WS502



WS504



WS601

**G. LUFFT Mess- und
Regeltechnik GmbH**

Lufft Germany:

Fellbach Office:

Postal Address:

Gutenbergstrasse 20
70736 Fellbach

Germany

Address:

P.O. Box 4252

70719 Fellbach

Germany

Phone: +49 711 51822-0

Fax: +49 711 51822-41

www.lufft.com

info@lufft.de

Berlin Office:

Carl-Scheele-Strasse 16

12489 Berlin

Germany

Phone: +49 711 51822-831

Fax: +49 711 51822-944

DASTECS R.L.

Representantes / Distribuidores Exclusivos

 **Argentina**

Tel: (+54 11) 5352 2500

Email: info@dastecsrl.com.ar

Web: www.dastecsrl.com.ar

a passion for precision · passion pour la précision · pasión por la precisión · passione per la precisione

Lufft North America:

Lufft USA, Inc.

1110 Eugenia Pl Unit B

Carpinteria, CA 93013

Phone: +01 888 519 8443

Fax: +01 805 845 4275

E-Mail: sales@lufftusainc.com

www.lufft.com



MARWIS won the Industry Award 2015 and is thus regarded as one of the greatest innovations in the SME sector.



In the Anniversary Edition of the Brand Lexicon, Lufft was proclaimed "Brand of the Century".

Lufft China:

Shanghai Office:

Measurement & Control

Technology Co., Ltd.

Room 507 & 509, Building No.3,

Shanghai Yinshi Science and

Business Park,

No. 2568 Gudai Road,

Minhang District,

201199 Shanghai, CHINA

Phone: +86 21 5437 0890

Fax: +86 21 5437 0910

E-Mail: china@lufft.com

www.lufft.cn




The Prism Awards are also known as the Oscars of Photonics. An eminent panel of experts distinguished MARWIS as a finalist.



G. Lufft belongs to the TOP 100 innovators. By winning this coveted prize awarded by the TOP 100 mentor Ranga Yogeshwar, we once again successfully demonstrated our innovative strength in a scientific selection process. This encourages us to continue on our chosen path of innovation and quality.



MARWIS helped us to win the 2015 Innovation Award of the State of Baden-Württemberg – also known as the Dr. Rudolf Eberle Award.



Lufft

www.lufft.de